

RS-485 System Controller **WV-CU360C**



PS•Data

KEY FEATURES

The WV-CU360C System Controller enables the following key functions.


- Camera selection
- Alarm (LED/Suspend/Recall/Reset)
- Setup menu

Remote control of the Panasonic dome camera series via PS•Data Link mode through WJ-MP204C.

- Camera functions: Super Dynamic III /Electronic Shutter/Electronic Sensitivity/Automatic Gain Control/Site Alarm
- Lens function: Iris/Focus/Auto Focus/Zoom
- Housing: Defroster/Wiper/Auxiliary 1 & 2
- Pan/Tilt: slow Pan/slow Tilt/Auto Pan/Auto Sort/Auto Sequence/Random Pan/Preset/Home, and finely turned panning / tilting

Remote control of the System650 and System150 via RS-485 communication Data.

REAR VIEW

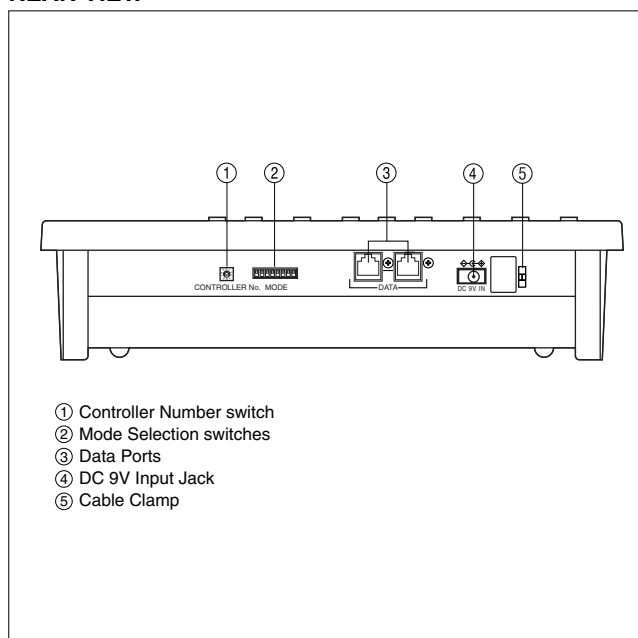


- ① Controller Number switch
- ② Mode Selection switches
- ③ Data Ports
- ④ DC 9V Input Jack
- ⑤ Cable Clamp

SPECIFICATIONS

Power Source	9V DC, 400mA (Use the supplied AC adapter only.)
Power Consumption	10W
Data Output/Input Port	6-conductor modular jack (RS-485, Full Duplex)
Switching Functions (WJ-MP204)	Camera selection
Switching Functions [WJ-FS409/FS416]	Monitor Selection/Switching of Live and Playback/Changing of the number of the Multiscreen Picture/Still/Electronic Zoom/Sequence
Controller Number	1-8 (Rotary Switch)
Unit Address Selection	1-99
Monitor Number Selection	1-99
Camera Number Selection	1-199
Camera Main Control	Camera Setup Camera Function
Lens Functions	Iris: Open/Close/Preset (only with DC control lens) Focus: Near/Far/Auto Focus Zoom: Wide/Tele
Housing	Defroster: On/Off Wiper: On/Off Auxiliary 1: On/Off Auxiliary 2: On/Off
Pan/Tilt	Manual Pan: Right/Left Manual Tilt: Up/Down Auto Pan, Auto Sort, Auto Sequence, Random Pan, Preset Position, Home Position, Camera Patrol
System Operation	Camera selection Alarm (Display/Suspend/Recall/Reset) Setup
Ambient Operating Temperature	-10°C - +50°C (14°F - 122°F)
Ambient Operating Humidity	Less than 90%
Dimensions	300 (W) x 74 (H) x 177 (D) mm [11-13/16" (W) x 2-15/16" (H) x 6-15/16" (D)]
Weight	1.3 kg (2.9 lbs.)
AC Adapter....1pc	6-conductor Modular Cable Assembly....1pc

DIMENSIONS

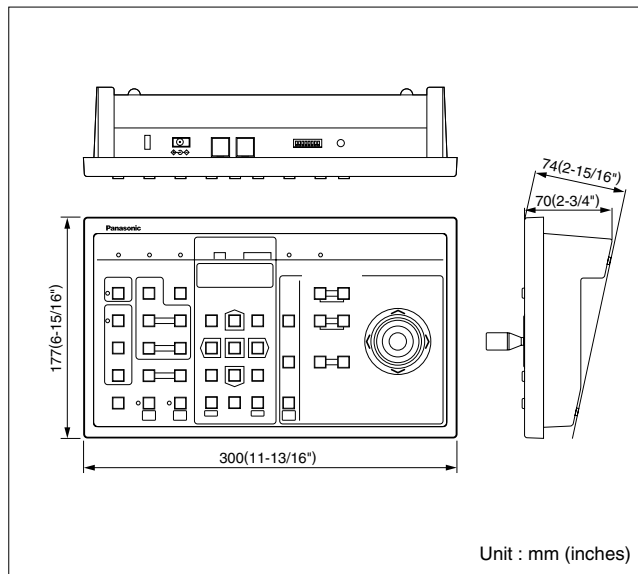

1.1 SERIES

IMAGE CAPTURE

PROCESSING

RECORDING/ARCHIVING

VIEWING